Kodak Li-Ion Rechargeable Battery

KLIC-5001

Recommended for Kodak digital cameras

Effective : January 2006

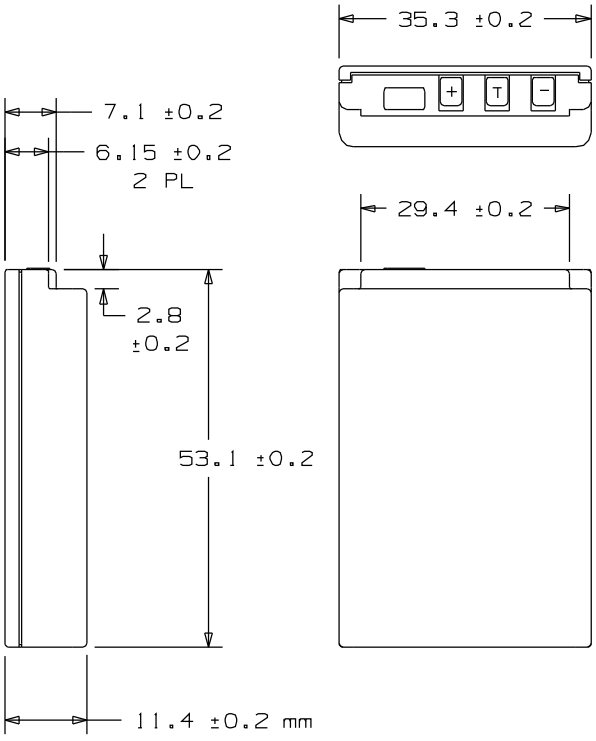

System:	Lithium Ion
Designation:	ANSI / IEC
Nominal Voltage:	3.7 Volts
Capacity:	1800 mAh nominal
End Voltage:	3.0 Volts
Charging Current: (Std.)	IC(=1.8)A
Charging Voltage:	4.20± 0.03 Volts
Charging Time: (Std.)	3 Hours
Discharging Current: (Std.)	IC(=1.8)A
Discharging Current: (Max.)	2.0 A
Charging Cycles:	Up to 300
Internal Resistance:	less than 150 mOhm
Temperature Range:	0° C to +50° C Operating -20° C to +30° C Storage 0° C to +40° C Charging
Approx. Weight:	47.0 grams
Volume:	20.9 cm^3
Terminals:	Flat Contacts
Jacket:	Plastic Housing, Film Label

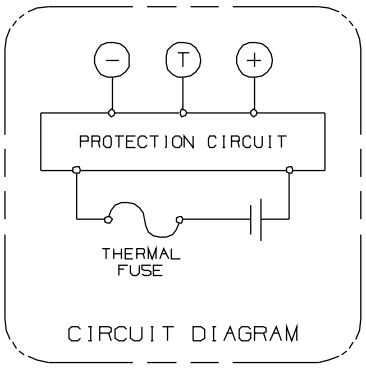

CIRCUIT DIAGRAM

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries

©Eastman Kodak Company, 2006 Kodak is a trademark.